


# SOM-3567

## Intel® Atom™ E3800 & Celeron® Processor QSeven CPU Module

**NEW**



Windows Embedded

iManager WISE-PaaS/RMM



### Features

- Intel® Atom® E3800 and Celeron® Processor Series
- Qseven® 2.1 Specification Compatible
- Onboard Dual Channel DDR3L-1333 up to 8GB, eMMC up to 32GB
- LVDS and HDMI/DP support H.264, MPEG2 HW Decode/Encode
- GbE, 3 PCIe x1, 1 USB3.0, 6 USB2.0
- iManager WISE-PaaS/RMM, and Embedded Software APIs

Software APIs:



Watchdog



I2C



SMBus



H/W Monitor



GPIO




Brightness Control

### Specifications

Compliance	Form-Factor	QSeven 70 x 70 mm				
	Pin-out Type	QSeven 2.1				
Platform	CPU	Atom® E3845	Atom® E3827	Atom® E3825	Atom® E3815	Celeron® J1900
	Base Frequency	1.91GHz	1.75GHz	1.33GHz	1.46GHz	2.00GHz
	Burst Frequency	-	-	-	-	2.42GHz
	Core/Thread	4/4	2/2	2/2	1/1	4/4
	LLC	2MB	1MB	1MB	512KB	2MB
	CPU TDP	10W	8W	6W	5W	10W
	Chipset	N/A				
	BIOS	AMI EFI BIOS				
Memory	Technology	DDR3L-1333	DDR3L-1333	DDR3L-1066	DDR3L-1066	DDR3L-1333
	ECC Support	Not support				
	Channel/Socket	Onboard Single/Dual Channels				
	Max. Capacity	Up to 8GB				
Graphics	Controller	Intel® Gen 7				
	Base/Turbo Freq.	542MHz	542MHz	533MHz	400 MHz	688 MHz
	Graphics Burst Frequency	792MHz	792MHz	-	-	854 MHz
	Graphics Memory	Up to 1720MB DVMT				
	3D/HW Acceleration	DX11, OGL3.2, OCL1.1, and H.264/AVC, VC-1, MPEG2 HW Decode/Encode				
Display	LCD	LVDS: Dual channel 18/24-bit, up to 1920 x 1080				
	DDI	1 DDI support HDMI/DVI/DP configurable HDMI 1.4b: 3840 x 2160 @ 30Hz or 2560 x 1600 @ 60Hz, 24 bpp DVI: up to 1920 x 1080 @ 60Hz DP 1.1a: 3840 x 2160 @ 30Hz or 2560 x 1600 @ 60Hz, 24 bpp				
	Multiple Display	Dual display (LCD + DDI)				
	PCI Express	3 PCIe x1, optional 4 ports while remove Ethernet; Support x1, x2, x4 configurable				
Expansion	Audio Interface	HD Audio				
	LPC	Yes				
	SMBus	Yes				
Serial Bus	I2C Bus	Yes				
	Ethernet	Controller	Intel® i210IT			
Onboard Storage	Speed	10/100/1000 Mbps				
	eMMC	eMMC4.51 up to 32GB				
	SATA	2 Ports, Support Gen3.1 (6Gb/s) and Gen2 (3 Gb/s) or Gen 1(1.5 Gb/s)				
I/O	USB3.0	1 Port				
	USB2.0	6 ports				
	SPI Bus	Support SPI BIOS EEPROM				
	GPIO	Not support GPIO mux with LPC				
	Watchdog	Multi-stage Watchdog Timer Output, 65536 level, 0 ~ 65535 sec				
	COM Port	4-wire COM 2 Ports (1 on MFG pins), optional support GPIO				
	Smart Fan	1 port				
	Power	Type	ATX: Vin, VSB, AT: Vin			
Supply Voltage		Vin: 5V±5%, VSB: 5V±5%, RTC Battery: 2.0-3.3V				
Power Consumption		TBD				
Environment	Temperature	0 ~ 60° C (32 ~ 140° F)				
	Humidity	Operating: 40° C @ 95% relative humidity, non-condensing Storage: 60° C @ 95%relative humidity, non-condensing				
	Vibration Resistance	3.5 Grms				
Mechanical	Dimensions	70 x 70 mm (2.75" x 2.75")				

## Block Diagram

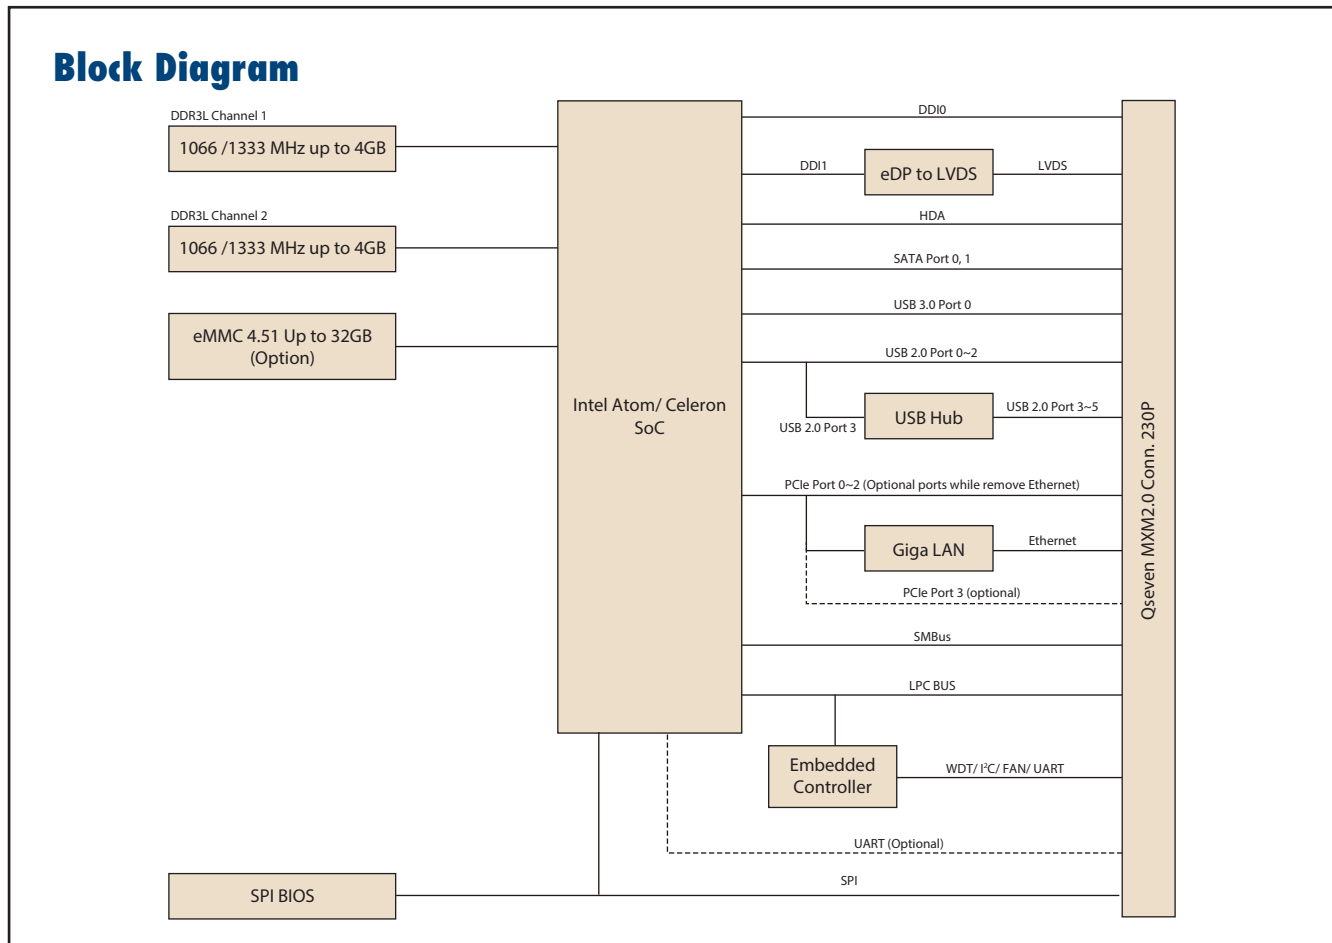

## Ordering Information

Part No.	CPU	Freq.	Core	CPU TDP	Memory	eMMC	Thermal Solution	Operating Temperature
SOM-3567CS0C-S9A1E	Atom E3845	1.91GHz	4C	10W	4GB	NA	Passive	0 ~ 60° C
SOM-3567BS0C-S7A1E	Atom E3827	1.75GHz	2C	8W	2GB	NA	Passive	0 ~ 60° C
SOM-3567CS0C-U0A1E	Celeron J1900	2.0GHz	4C	10W	4GB	NA	Passive	0 ~ 60° C
SOM-3567CMBX-S9A1E	Atom E3845	1.91GHz	4C	10W	4GB	32GB	Passive	-40~85° C
SOM-3567BS0X-S7A1E	Atom E3827	1.75GHz	2C	8W	2GB	NA	Passive	-40~85° C

## Packing List

Part No.	Description	Quantity
-	SOM-3567 Qseven CPU Module	1
1960076583N000	Heatspreader	1

## Optional Accessories

Part No.	Description
1960058145N001	Semi-Heatsink, 70L x 63W x 13.2H (0 ~ 60° C)
1960061089N001	Semi-Heatsink, 70L x 63W x 34H (-40 ~ 85° C)

## Development Board

Part No.	Description	Quantity
SOM-DB3520-00A1E	Qseven Development Board	1

## Embedded OS

OS	Part No.	Description
WES7	2070014541	img WES7E SOM-3567 X64 V5.7.0 Eng

# Microtron®

Flexible electronic solutions